

# MULTI DEVICE

## Gripping Force Tester GFT-X 4.0

Wireless gripping force and speed measuring of jaw chucks and collet chucks in dynamic or static measuring mode



### Measuring heads

#### M3 / M4

Measuring heads for jaw chucks

Clamping-Ø 72 to 108 mm



Measuring head convertible for 2 and 3 jaws

Measuring head	Range / gripping force	
	2 Jaws	3 Jaws
M3	0 to 180 kN	0 to 270 kN
	Id. No. 207074	
M4	0 to 30 kN	0 to 45 kN
	Id. No. 207259	




Separate measuring head for 2, 3 and 6 jaws

Measuring head	Range / gripping force
	6 Jaws
M3-6	0 to 270 kN on request
M4-6	0 to 45 kN on request

#### M2

Measuring head for collet chucks

Clamping-Ø 42 mm




For collets with 3 segments

Measuring head	Range / gripping force
	Collets
M2	0 to 120 kN
	Id. No. 207258

#### M1

Measuring head for collet chucks

Clamping-Ø 18 mm




For collets with 3 segments

Measuring head	Range / gripping force
	Collets
M1	0 to 75 kN
	Id. No. 207257

## Features GFT-X 4.0

- **Wireless data transfer** from measuring head to table via Bluetooth for the measuring of dynamic and static clamping forces and speed (with included bracket)
- **Built-in camera** in tablet
- **Assistance systems:**  
Manuals, Jaw Finder, Chuck Finder, Technical calculations
- **Rechargeable battery**, operation time in use: 8h
- **Smart user interface**
- Tablet suitable for **industrial use**  
(Protection class IP 67)
- **Display** kN or lbf
- **Languages:**  
German, English, Italian, Spanish, Russian, Chinese and Japanese
- **Measured clamping forces can be evaluated**  
by the integrated software or by the display software on Laptop / PC
- **4 Measuring heads** for jaw chucks and  
**2 Measuring heads** for collet chucks

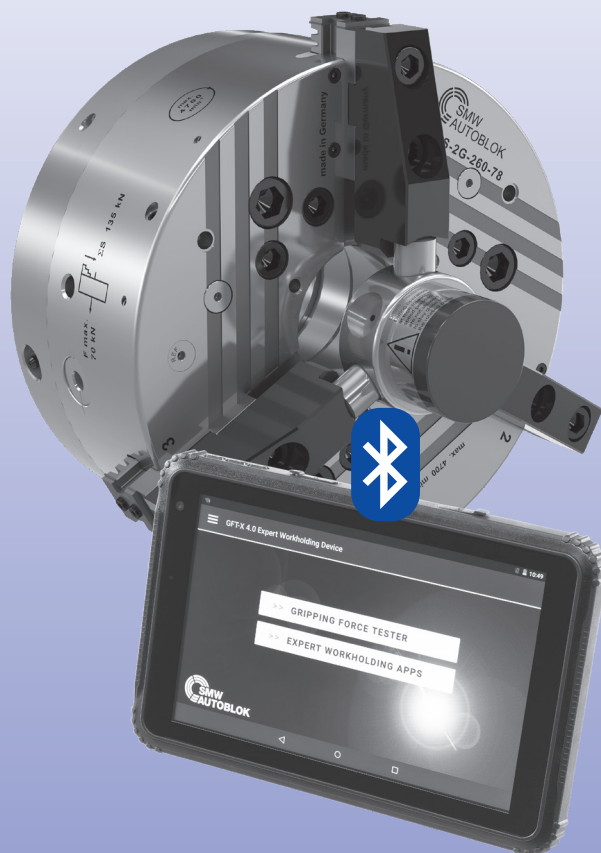

## Gripping force tester – GFT-X 4.0 with measuring head



# GFT-X 4.0

## Wireless Gripping Force Tester

Expert Multi Device

- Technical data
- Ordering review

### Standard equipment with GFT-X 4.0

Case with:

- Large Multi Device Tablet.
- Measuring head M3 (2 and 3 jaws) for jaw chucks with extensions and loading device.
- Torx-key T15 and spare screws.
- Bracket with magnet for measuring of speed.
- Loading cable with USB port.
- USB cable for Tablet.
- Adapter for USA, UK and Southern Europe.

### Ordering data

GFT-X 4.0 case incl. Tablet, Measuring head M3 (2 and 3 jaws) Id. No. 206844

### Option:

Measuring head M1 (for collet chucks)	Id. No.	207257
Measuring head M2 (for collet chucks)	Id. No.	207258
Measuring head M3 (2 and 3 jaws)	Id. No.	207074
Measuring head M4 (2 and 3 jaws, high-precision)	Id. No.	207259
Measuring head M3 (6 jaws)	Id. No.	207586
Measuring head M4 (6 jaws, high-precision)	Id. No.	207587



### Display software PC / Laptop


- The data transfer is via an USB interface.
- The software can be run under all standard windows systems.

### Input

- Automatic measuring of the data (gripping force - speed).
- The number of measuring steps can be programmed free.

### Output

- Table gripping force / speed.
- Diagram gripping force / speed.

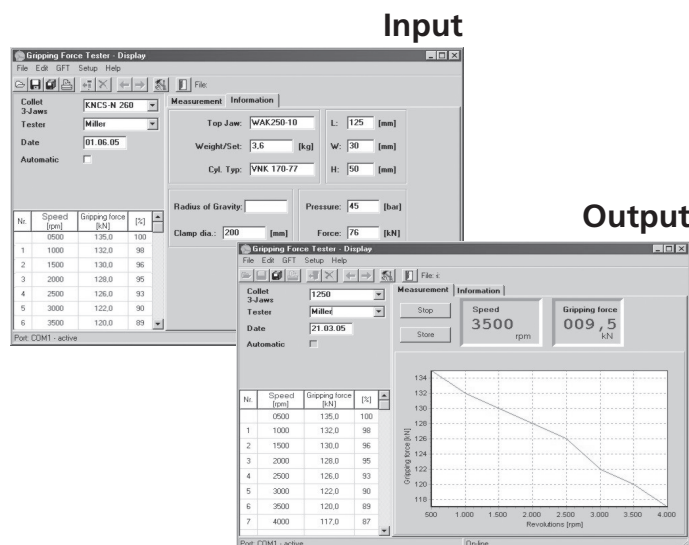

### Technical data

Tablet	
Display / Grip force F – speed	Display in kN / lbf - r.p.m
Data transfer	Bluetooth 4.0
Power supply / Transformer	100 / 240 V AC, 50 to 60 Hz
Distance Tablet / Measuring head	1-4 m (appr.)
Interface PC / Laptop	USB 2.0
Operating temp.	0 to 40° (32°-100 °F)
Protection class	IP 67

**Warning:** Machine door must be closed while measuring head is rotating!

Measuring heads				
	Measuring head M1	Measuring head M2	Measuring head M3	Measuring head M4
Application	collet Ø 18	collet Ø 42	chuck 2 / 3 or 2 / 3 / 6 jaws	
Clamping diameter	18 mm	42 mm	72 to 108 mm	72 to 108 mm
No. of jaws	collet 3 x slotted	collet 3 x slotted	2 and 3 jaws / 6 jaws	
Power supply	internal rechargeable capacitor			
Capacity of power supply	ca. 1.5 h at 50 % d.c.			
Data transfer	Bluetooth 4.0			
Range / gripping force F max.	0 to 75 kN	0 to 120 kN	0 to 180 kN (2-jaws) 0 to 270 kN (3 / 6-jaws)	0 to 30 kN (2-jaws) 0 to 45 kN (3 / 6-jaws)
Speed r.p.m	<10.000 r.p.m.	<8.000 r.p.m.	<6.000 r.p.m.	<6.000 r.p.m.
Accuracy (F / r.p.m)	<5% / <1% fsr	<5% / <1% fsr	<3% / <1% fsr	<1.5% / <1% fsr